



TIMERS

ENERLITES timers are designed and built to meet a high standard of innovation, quality, and design for maximum energy savings. Products consist of wall box mounted, 7 day digital timers, 24 hour mechanical timers and countdown timers. These timers allow users to control and manage interior/exterior lighting, holiday lighting, security lighting, exhaust fans, cooling and heating central air units, and small appliances. All timers are designed for residential or commercial applications.




TIMERS

Digital Programmable Timer	C3
Mechanical In-Wall Timer	C4
7-Button Preset In-Wall Timer	C5-C6



Timers

ENERLITES timers consist of digital or mechanical time display. These devices are easy to add, set, adjust and apply to a particular function. Individual digital or mechanical timers give users the ability to control interior/exterior lighting, seasonal lighting, heating, cooling, refrigeration systems, fan task lighting, and irrigation systems.

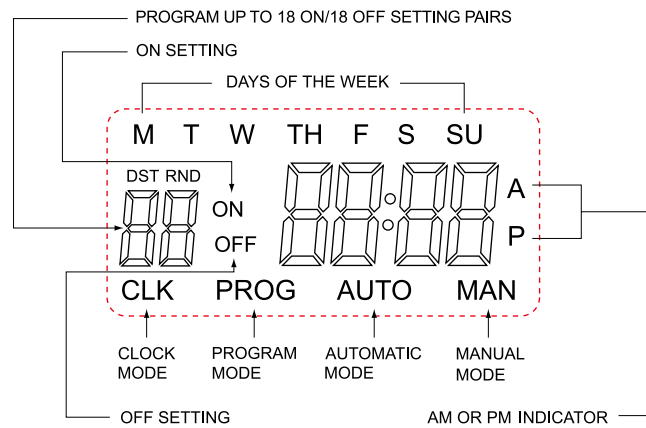

Digital Programmable Timer

Features:

- Automatic or manual operation
- Push the MAN button to switch On/Off at any time
- Program up to 18 On/Off settings per week
- Random feature (RND)
- Daylight savings time feature (DST)
- Can delete and recover any program (RCL)
- Large digital LCD display
- Standard decorator style wall plate included

- Built-in memory holds settings indefinitely without power
- Various colors available
- Two year warranty

Testing & Code Compliance:

- UL/CUL Listed
- CA Title 24

7-day Heavy Duty Digital In-Wall Timer (Model No. HET01)


DESCRIPTION	CAT. NO.	RATING	COLOR
Single Pole, neutral wire required 120 VAC, 60 Hz	HET01	Resistive Rating: 15 A, 1800 W Tungsten Rating: 1200 W Motor Load: 1/2 HP	Ivory White

Multiple daily settings options:

- All days of the week
- Individual selected days of the week
- 5 weekdays + weekends

Specs

- Single pole
- Resistive Rating: 15 A, 1800 W
- Tungsten Rating: 1200 W
- Motor Load: 1/2 HP
- Voltage: 120 VAC, 60 Hz
- Operating Temperatures: 32°F to 104°F

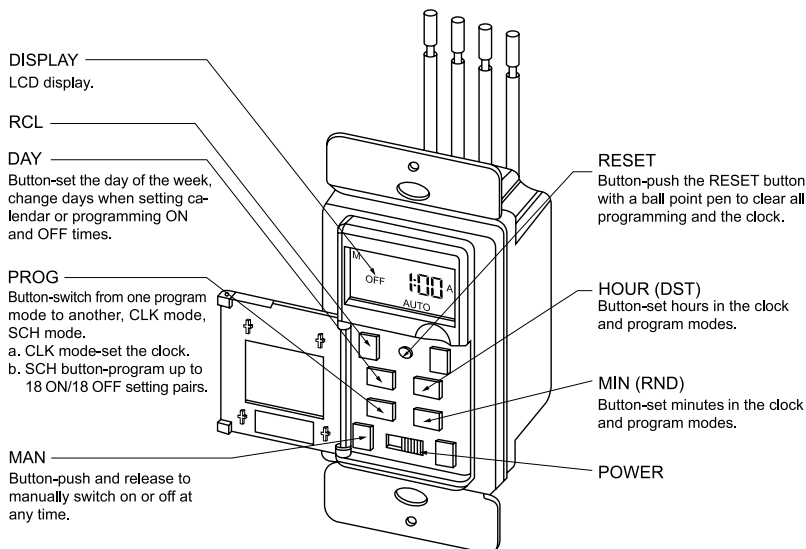

Typical Applications:

- Interior Lighting
- Exterior Lighting
- Seasonal Lighting
- Fans
- Bathrooms



Mechanical In-Wall Timer

Features:

- Mounts in a standard electrical wall box
- Up to 24 On/Off settings per day
- ON/OFF/Timer slide switch
- Maximum On/Off Time: 23 hours and 30 minutes
Minimum On/Off Time: 30 minutes
- 48 integrated trippers
- Operating temperatures: 0°F to +104°F (0°C to +40°C)

- Two year warranty

Testing & Code Compliance:

- ETL Listed



HMT01N

24 Hour Mechanical In-Wall Timer (Model No. HMT01N)

DESCRIPTION	CAT. NO.	RATING	COLOR
Single Pole, 120 VAC, 60 Hz	HMT01N	Resistive Rating: 15 A, 1800 W Tungsten Rating: 1250 W Motor Load: 1/2 HP Electric Ballast: 500 VA	White

The slide switch provides a manual operation load to override the timer. Set the timer to the "OFF" position, the load will be continuously off; set the timer to "ON", it will be continuously on. For automatic timer function to turn on/off, the switch must be in the AUTO position.



7-Button Preset In-Wall Timer

Features:

- 7-Button Preset In-Wall Timer
- Replaces a standard light or fan single pole switch
- Works with most common lighting types
- Ideal for your closet, pantry, garage, laundry room, outdoor lighting, and spa
- Two year warranty

Testing & Code Compliance:

- UL/CUL Listed

HET06-R Time Switch, 7-Button Preset (MAX 4 Hours)


DESCRIPTION	CAT. NO.	RATING	COLOR
Single Pole, neutral wire required 120 VAC, 60 Hz	HET06-R	Incandescent: 1800 W Fluorescent: 1200 VA Motor: 1/2 HP	Ivory White



Specs

- Time Delay: 5, 10, 30, 60 min, 2 hr, and 4 hr
- Environment: commercial indoor use only
- Operating Temperature: 32°F to 131°F (0°C to 55°C)
- Humidity: 95%RH, non-condensing
- LED lighting only flashes twice when the time delay expires

Wiring Diagram

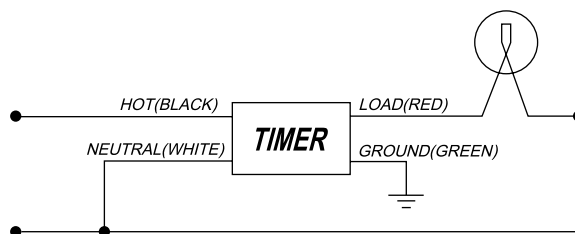

7-Button Preset In-Wall Timer

Features:

- CFL/LED compatible
- 6 preset times to have your lights remain on, and then automatically turn off
- Never worry about leaving lights or bathroom fans on for long periods of time
- Accessible manual on/off button
- Sleek mount flush with wall plate
- Two year warranty

Testing & Code Compliance:

- UL/CUL Listed



HET06-12

HET06-12 Time Switch, 7-Button Preset (MAX 12 Hours)

DESCRIPTION	CAT. NO.	RATING	COLOR
Single Pole, neutral wire required 120 VAC, 60 Hz	HET06-12	Incandescent: 1800W Fluorescent: 1200VA LED: 150W Motor: 1/2 HP	Ivory White

Specs

- Time Delay: 1/2, 1, 2, 4, 8, or 12 hours
- Environment: Commercial indoor use only
- Operating Temperature: 32°F to 131°F (0°C to 55°C)
- Humidity: 95%RH, non-condensing

Wiring Diagram

