

# TAMPER RESISTANT RECEPTACLES

Now ELERLITES tamper resistant receptacle keep children safe! Our patented protective shutter system prevents kids from inserting hairpins, keys, paperclips and other common household objects!

## Features and Benefits:

- UL listed-subjected to intense, documented testing procedures.
- Permanent-once installed, they offer continuous protection, unlike plastic outlet caps that can be removed or forgotten.
- Reliable-this hard-wired solution eliminates the worry about inserting, losing or breaking the device.

# G

## TAMPER RESISTANT RECEPTACLES

Decorator Devices .....	G3
Standard Devices .....	G4






# Decorator Devices

## Safety and Convenience

Your home wiring must meet basic safety standards to keep you and your family safe. ENERLITES's Tamper Resistant Receptacles are designed to prevent anything but a plug to be inserted into it keeping you and your family safe.



Specially designed for increased protection of children in their homes.

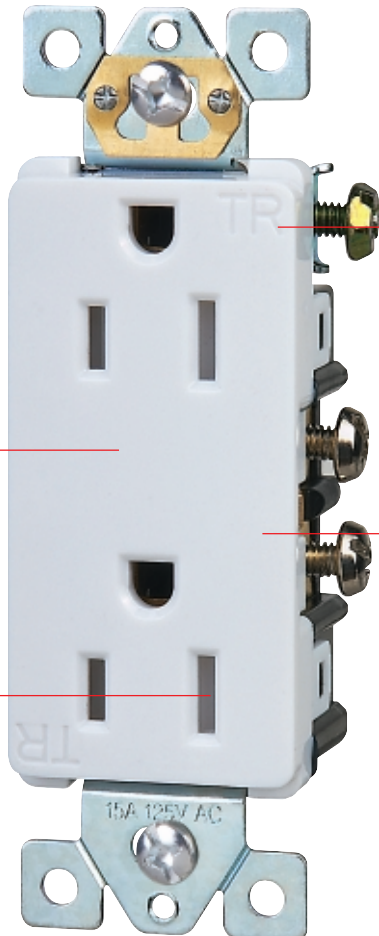

High impact-resistant thermo-plastic construction.

Spring-loaded shutters lock out a single object, effectively blocking entry to the contacts.

Clearly visible "TR" markings on face of device.

All screws are tri-drive

### AVAILABLE COLORS

I	W	A	LA	BR	BK
Ivory	White	Almond	Light Almond	Brown	Black

CALL FOR COLOR AVAILABILITY



## Decorator Devices

### Features:

- Built-In protective shutter mechanism designed to prevent the insertion of foreign objects into the receptacle contact openings. Allows easy insertion of properly rated plugs.
- Clearly visible "TR" marking on the face of device.
- High impact-resistant thermoplastic cover and body for long service life in commercial applications.
- Slotted, Phillips and Robertson tri-combo screw heads offer greater installation flexibility.
- Green grounding screw and self-ground-ing clip for automatic grounding in grounded metal wallboxes.

- Shallow design for maximum wiring room in box.
- Washer-type break-off plaster ear for best.

### TESTING & CODE COMPLIANCE:

- UL Listed
- ISO9001 Registered manufacturing facility

### MATERIAL CHARACTERISTICS:

- Environmental: Flammability UL94, V2 Rating
- Operating temperatures: From -40°C (without impact) to 75°C maximum continuous



### Residential Grade 15AMP Push-In and Side Wired

DESCRIPTION	CAT.NO.	COLOR
Decorator Duplex Receptacle, Tamper Resistant Self-Grounding <b>NEW</b>	61501-TR-I	Ivory
	61501-TR-W	White
	61501-TR-A	Almond
	61501-TR-LA	Light Almond




### Commercial Grade Back and Side Wired

DESCRIPTION	CAT.NO.	COLOR
Duplex Receptacle, Tamper Resistant <b>NEW</b> 15A/125V, 5-15R	61560-TR-I	Ivory
	61560-TR-W	White
Duplex Receptacle, Tamper Resistant <b>NEW</b> 20A/125V, 5-20R	62060-TR-I	Ivory
	62060-TR-W	White

### Isolated Ground Receptacle Back and Side Wired

DESCRIPTION	CAT.NO.	COLOR
Duplex Receptacle, Tamper Resistant <b>NEW</b> 15A/125V, 5-15R	61500-IG-TR-I	Ivory
	61500-IG-TR-W	White
	61500-IG-TR-O	Orange
Duplex Receptacle, Tamper Resistant <b>NEW</b> 20A/125V, 5-20R	62000-IG-TR-I	Ivory
	62000-IG-TR-W	White
	62000-IG-TR-O	Orange





## Standard Devices

### Features:

- Impact-resistant thermoplastic cover and body
- All terminal and mounting screws combination head
- Push-in and side-wiring options
- Easy-to-read "TR" markings onto face
- Tamper resistant version features dual mechanical shutter system to help prevent insertion of foreign objects
- Smooth face does not collect dirt

### TESTING & CODE COMPLIANCE:

- UL Listed
- ISO9001 Registered manufacturing facility

### MATERIAL CHARACTERISTICS:

- Environmental: Flammability UL94, V2 Rating
- Operating temperatures: From -40°C (without impact) to 75°C maximum continuous

ENERLITES Tamper Resistant Receptacle make it easy for you to comply with the 2008 NEC, offering you a more reliable and safer home.



### Residential Grade

Tamper Resistant Receptacles 2 Pole, 3 Wire Grounding, 15A 125V

DESCRIPTION	CAT.NO.	COLOR
Standard Duplex Receptacle, Self-Grounding	61580-TR-I	Ivory
	61580-TR-W	White
	<b>NEW</b> 61580-TR-A	Almond
	61580-TR-LA	Light Almond



61580-TR-W

### Commercial Grade

Back and Side Wired

DESCRIPTION	CAT.NO.	COLOR
Duplex Receptacle, Tamper Resistant	61540-TR-I	Ivory
	<b>NEW</b> 61540-TR-W	White
Duplex Receptacle, Tamper Resistant	62040-TR-I	Ivory
	<b>NEW</b> 62040-TR-W	White



61510-TR-W

### Isolated Ground Receptacle

Back and Side Wired

DESCRIPTION	CAT.NO.	COLOR
Duplex Receptacle, Tamper Resistant	61510-TR-I	Ivory
	<b>NEW</b> 61510-TR-W	White
	61510-TR-O	Orange
Duplex Receptacle, Tamper Resistant	62010-TR-I	Ivory
	<b>NEW</b> 62010-TR-W	White
	62010-TR-O	Orange



5-15R



5-20R